

Eco-Counter LED

120V Undercabinet

Linkable Series


Catalog #:

Type:

Project:

Date:

Notes:

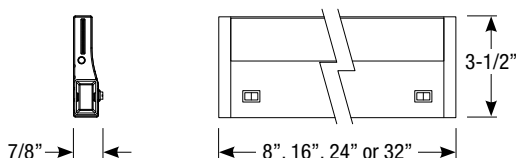

Order Matrix

Eco-Counter Order Matrix (Example: ECL-32-BZ-30-3)

Series	Length	Finish	CCT / CRI	Rev
ECL	☐ -8 (8")	☐ -WT (White)	☐ -27 (2700K / 90 CRI)	-3
	☐ -16 (16")	☐ -BZ (Bronze)	☐ -30 (3000K / 90 CRI)	
	☐ -24 (24")	☐ -SA (Satin Aluminum)		
	☐ -32 (32")			



SpeedLink™ Interlink Cables

Cable Length	Finish
☐ QL-10 (10")	☐ WT (White)
☐ QL-18 (18")	☐ BK (Black)



Cord and Plug

Cable Length	Finish
☐ PL96 (96")	☐ WT (White)
	☐ BK (Black)



Master Switch (3-1/2" x 4" x 7/8")

Switch	Finish
ECL-MS	☐ WT-3 (White)
	☐ BZ-3 (Bronze)
	☐ SA-3 (Satin Aluminum)

Electrical Data

Part Number	Wattage	Lumens	Efficacy
ECL-8 (8")	6W	350lm	58lpw
ECL-16 (16")	12W	700lm	58lpw
ECL-24 (24")	18W	1050lm	58lpw
ECL-32 (32")	24W	1400lm	58lpw

Specifications

Description

Low profile Eco-Counter series with integral electronic driver provides even illumination on all surfaces. Available in four lengths and two color temperatures.

LED Light Engine

- 6W, 12W, 18W or 24W LED @ 2700K or 3000K at 90 CRI
- 50,000 hours at 70% lumen maintenance (L70)

Integral Dimming Driver

- Integrated 120V driver
- Incandescent and ELV dimmable
- Linkable up to 600W

Mounting

Includes mounting hardware (captive screws). Can be hardwired at any point along the run or plugged into receptacle with a cord and plug (ordered separately).

Housing

- Slim 7/8" profile
- Extruded aluminum housing
- Edge-lit acrylic lens eliminates LED image on surfaces

Finishes

Available in white, bronze or satin aluminum

Linkable Cables and Connectors

Eco-Counter can link multiple luminaires up to 600W. Linkable with 10" or 18" SpeedLink interlink cables or end-to-end with seamless connectors.

On/Off Switch

Eco-Counter series can be controlled from individual on/off switches or from one master switch. Master switch can be directly connected to the end of a run or moved to a discrete area with SpeedLink interlink cables. (ordered separately)

Listing/Warranty

- Five (5) year limited warranty
- UL listed to US and Canadian standards for damp locations
- Title 24 compliant



Revised 08/09/17